
article#	**524-2dv**
article description	**CEE-wall mounted plug 32A 4p 2h IP44 with lid**
description long	CEE-wall mounted plug 32A 4p 2h IP44 with lid housing material: PA6 rated current: 32A number of poles: 4 (3P+PE) clock-position: 2h rated voltage/frequency: >50V~ / 300-500Hz contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44
country of origin	AT
customs number	85366990
packaging quantitiy	10
minimum order quantitiy	10



ETIM 9.0	EC001319
IEC-amperage	32 A
Voltage according to EN 60309-2	50-500 V (>300-500 Hz) green
Number of poles	4
Clock hour position	2 h
Identification colour	Green
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Surface mounted device plug
Phase inverter	False
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

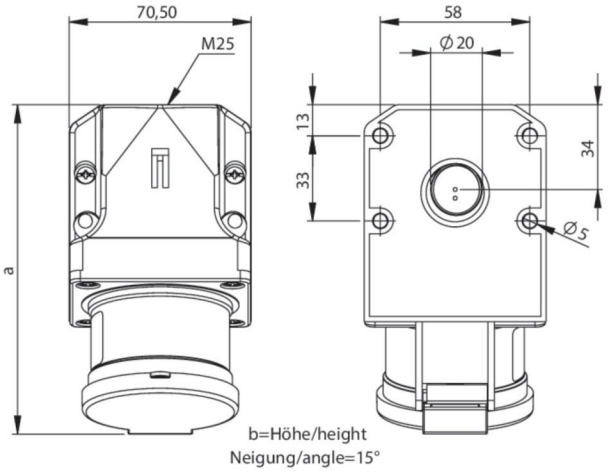

a	137 mm
b	99 mm
wire flexible	2,5-6 mm²
wire solid	2,5-10 mm²
contact screws	110 Ncm
housing screws	110 Ncm
connecting screws	110 Ncm
dismantling length	50 mm
stripping length	12-14 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=524-2dv

Changes and printing errors reserved!

(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.I. - Austria - www.pcelectric.at