
| | |
|---|---|
| article# | **5239-6** |
| article description | **CEE-inlet wall mount 30A 2P3W 6h IP44 UL** |
| description long | CEE-inlet wall mount 30A 2P3W 6h IP44 UL (PCE330BS6S)<br>housing material: PA6<br>rated current: 32A/30A<br>number of poles: 2P3W (3p)<br>clock position: 6h<br>rated voltage: 250VAC<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP44<br>according to UL1682 und IEC/EN 60309-2 (SERIE II)<br>UL-product category: QLIW / QLIW7<br>UL-file number: E252008 |
| GTIN (EAN) | 9003399499944 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.212 kg |
| packaging quantitiy | 10 |
| minimum order quantitiy | 10 |



| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 32 A |
| Amperage according to UL/CSA (for UL-version) | 30 A |
| Number of poles | 3 |
| Clock hour position | 6 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Construction type | Surface mounted device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

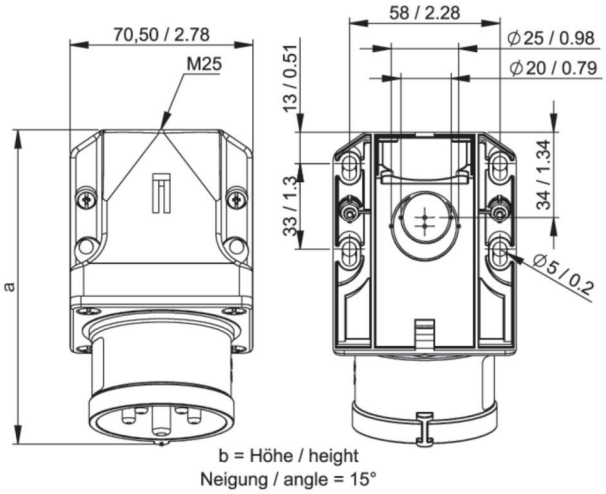


| | |
|---|---|
| a | 5.16 inch |
| b | 3.23 inch |
| wire flexible | 14-10 AWG |
| wire solid | 2,5-10 mm² |
| contact screws | 9.74 lbf-in |
| housing screws | 9.74 lbf-in |
| connecting screws | 9.74 lbf-in |
| dismantling length | 1.97 inch |
| stripping length | 0.47-0.55 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=5239-6

Changes and printing errors reserved!

2/23/2026