| | |
|---|---|
| article# | **380100101-w** |
| article description | **PCE PRI:CHARGER 22kW DOT2 4G ERK ws bE** |
| description long | PCE PRI:CHARGER Charging Station for Electric Vehicles<br>Connection: (230)400V AC, 50Hz, (1)3-phase<br>Number of charging units: 1<br>Socket outlet Type 2 with locking actuator<br>Max. power per charging point: 22kW<br>Nominal connection power: 22kW<br>WxHxD: 368x356x167 mm<br>Mounting method: Wall mounting<br>Protection: RCCB A + DC-fault protection (6mA)<br>Access control: RFID<br>Controller: ICC1324<br>Communication interface: 4G Module, WiFi<br>Communication: OCPP 1.6 JSON, Modbus TCP<br>ISO 15118 Powerline Communication (PLC) for plug & charge/ autocharge<br>meter in compliance with calibration law<br>Backend system: preconfiguration reev for immediate start-up<br>Material housing: plastic/ black<br>Front Design: PCE standard, white<br>Degree of protection: IP54<br>Ambient temperature: -20°C bis +40°C<br>Standards: IEC 61851-1, IEC 61851-22, IEC 62196<br><br>be.ENERGISED Monitoring Package Single #104046701<br>1 pc. configuration instructions<br>1 pc. SIM card, 2 pcs. QR code<br>1 pc. instructions for activiation, 2 pcs. RFID tags |
| GTIN (EAN) | 9003399641961 |
| country of origin | AT |
| customs number | 85371098 |
| net weight | 7.500 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |

| | |
|---|---|
| ETIM 9.0 | EC002883 |
| Installation side connection model | 3-phase |
| Input voltage | 230 – 400 V |
| Frequency | 50 Hz |
| Nominal connection power | 22 kW |
| Number of charging units | 1 |
| Max. power per charging point | 22 kW |
| Width | 368 mm |
| Height | 356 mm |
| Depth | 167 mm |
| Mounting method | Wall mounting |
| Number of socket outlets Type 2 | 1 |
| Number of earth leakage circuit breakers type A | 1 |
| Charging cable permanently lockable at charging device | True |
| DC residual current detection | True |
| Contactor welding detection | False |
| With circuit breaker | False |
| Network-enabled as a master | True |
| Network-enabled as an extender | False |
| Networkable via LAN | True |
| Networkable via Wi-Fi | True |
| LTE | True |
| With energy meter | True |
| With built-in RFID card | True |


Changes and printing errors reserved!

| | |
|---|---|
| reader | |
| NFC (Near Field Communication) | True |
| Static load management integrated | True |
| Suitable for dynamic load management | True |
| Open Charge Point Protocol (OCPP) version | 1.6 |

https://www.pcelectric.at/shop/en/?func=detail&artnr=380100101-w



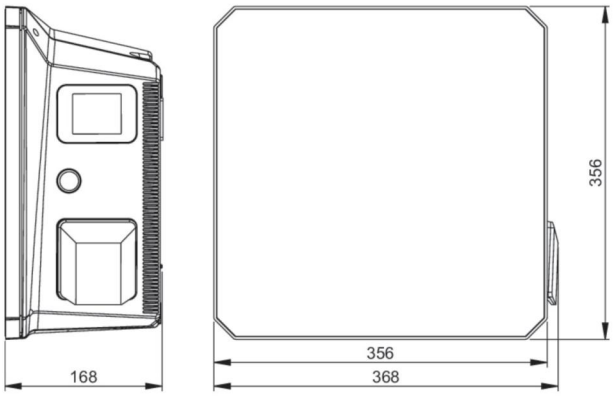


Changes and printing errors reserved!



(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.I. - Austria - www.pcelectric.at