
article#	**134-2**
article description	**CEE-wall mounted socket 63A 4p 2h IP67 POWER TWIST**
description long	CEE-wall mounted socket 63A 4p 2h IP67 POWER TWIST housing material: PC/ABS rated current: 63A number of poles: 4 (3P+PE) clock-position: 2h rated voltage/frequency: >50V~ / 300-500Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws cable entry: top, bottom, rear inc. threaded blind cap IP protection class: IP66/IP67
GTIN (EAN)	9003399840043
country of origin	AT
customs number	85366990
net weight	0.862 kg
packaging quantitiy	1
minimum order quantitiy	1





ETIM 9.0	EC001321
Model	Surface mounted
IEC-amperage	63 A
Number of poles	4
Voltage according to EN 60309-2	50-500 V (>300-500 Hz) green
Clock hour position	2 h
Identification colour	Green
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Gland nut
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Type of fastening	External mounting
Insulated mounting	True
Military model	False

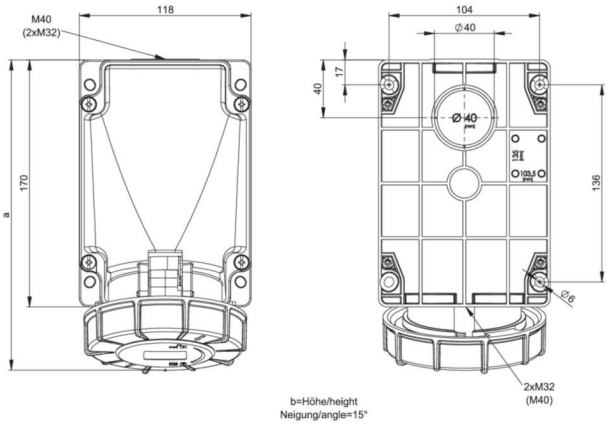

a	213 mm
b	173 mm
wire flexible	6-16 mm²
wire solid	6-25 mm²
contact screws	200 Ncm
housing screws	200 Ncm
dismantling length	100 mm
stripping length	15-18 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=134-2

Changes and printing errors reserved!

9/26/2024