
| | |
|---|---|
| article# | **6349-6** |
| article description | **CEE-inlet flange 100x100 straight 60A 3P4W 6h IP69k UL** |
| description long | CEE-inlet flange 100x100 straight 60A 3P4W 6h IP69k UL (PCE460B6W)<br>housing material: PA6<br>rated current: 60A<br>number of poles: 3P4W (4p)<br>clock position: 6h<br>rated voltage: 380-415VAC<br>contacts: brass nickel plated<br>connection technology: frame terminals with screws<br>IP rating: IP6X, X6, X7, X9k (watertight)<br>UL type: 4, 4X<br>HP-rating (locked rotor): 10<br>according to UL1682 and IEC/EN 60309-2 (SERIES II)<br>UL-product category: QLIW / QLIW7<br>UL-file number: E252008 |
| GTIN (EAN) | 9003399660863 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.497 kg |
| packaging quantitiy | 2 |
| minimum order quantitiy | 2 |



| | |
|---|---|
| ETIM 10.0 | EC001319 |
| Amperage according to UL/CSA (for UL-version) | 60 A |
| Voltage according to EN 60309-2 | 380-415 V (50+60 Hz) red |
| Number of poles | 4 |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Construction type | Built-up device plug |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

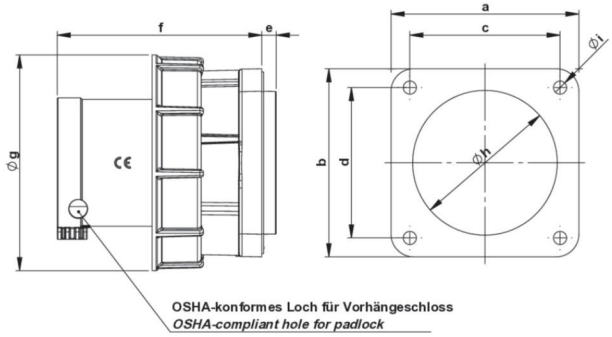


| | |
|---|---|
| a | 3.94 inch |
| b | 3.94 inch |
| c | 3.15 inch |
| d | 3.15 inch |
| e | 0.31 inch |
| f | 4.29 inch |
| g | 4.53 inch |
| h | 3.03 inch |
| i | 0.28 inch |
| wire flexible | 10-4 AWG |
| contact screws | 17.7 lbf-in |
| connecting screws | 17.7 lbf-in |
| stripping length | 0.59-0.71 inch |
| temperature resistance | -13 – 176 °F |

https://www.pcelectric.at/shop/en/?func=detail&artnr=6349-6

Changes and printing errors reserved!

5/5/2026