
| | |
|---|---|
| article# | **0331-1** |
| article description | **CEE-plug 63A 3p 1h IP44 POWER TWIST** |
| description long | CEE-plug 63A 3p 1h IP44 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 3 (2P+PE)<br>clock-position: 1h<br>rated voltage/frequency: >50V / others<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>IP protection class: IP44 |
| GTIN (EAN) | 9003399674914 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.530 kg |
| packaging quantitiy | 2 |
| minimum order quantitiy | 2 |



| | |
|---|---|
| ETIM 10.0 | EC000140 |
| IEC-amperage | 63 A |
| Number of poles | 3 |
| Voltage according to EN 60309-2 | Other |
| Clock hour position | 1 h |
| Identification colour | Grey |
| RAL-number | 7046 |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Suitable for cable diameter | 14.5 – 36 mm |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

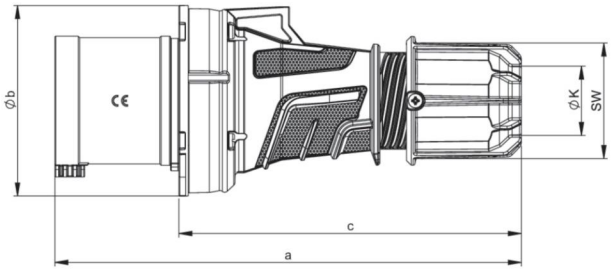


| | |
|---|---|
| a | 250 mm |
| b | 102 mm |
| c | 184 mm |
| K (cable Ø) | 14,5-36 mm |
| SW | 61 mm |
| wire flexible | 6-16 mm² |
| contact screws | 200 Ncm |
| connecting screws | 200 Ncm |
| strain relief | 1500 Ncm |
| dismantling length | 100 mm |
| stripping length | 15-18 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |
| IK-code *) | IK09 |

https://www.pcelectric.at/shop/en/?func=detail&artnr=0331-1

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

Changes and printing errors reserved!

3/18/2026