
| | |
|---|---|
| article# | **75625-6v-p** |
| article description | **CEE-wall mounted plug 32A 5p 6h IP44 with switch** |
| description long | CEE-wall mounted plug 32A 5p 6h IP44 with switch<br>housing material: PA6<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44<br>load max. 25A |
| GTIN (EAN) | 9003399064494 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.550 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |



| | |
|---|---|
| ETIM 10.0 | EC001319 |
| IEC-amperage | 32 A |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles | 5 |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Construction type | Surface mounted device plug |
| Phase inverter | False |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

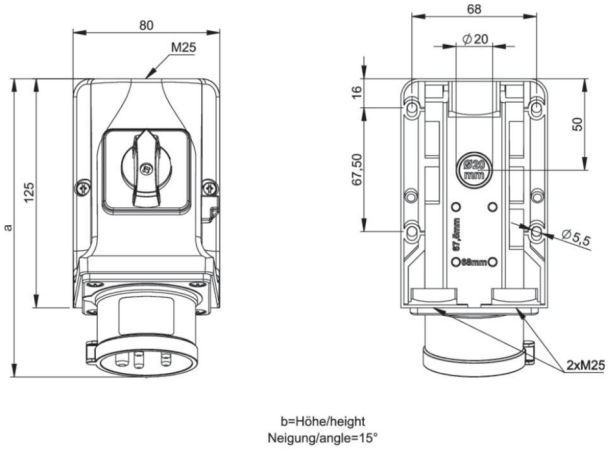


b=Höhe/height
Neigung/angle=15°

| | |
|---|---|
| a | 174 mm |
| b | 128 mm |
| wire flexible | 2,5-6 mm² |
| wire solid | 2,5-6 mm² |
| housing screws | 110 Ncm |
| connecting screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=75625-6v-p

Changes and printing errors reserved!

6/2/2026