


| | |
|---|---|
| article# | **777242-4** |
| article description | **CEE-flanged plug angled 32A 4p 4h IP67** |
| description long | CEE-flanged plug angled 32A 4p 4h IP67<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 4 (3P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP67 |
| country of origin | AT |
| customs number | 85366990 |
| packaging quantitiy | 5 |
| minimum order quantitiy | 5 |

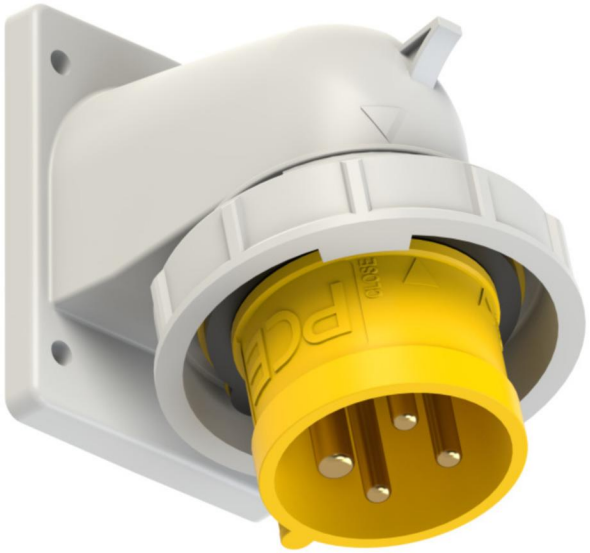

| | |
|---|---|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 32 A |
| Voltage according to EN 60309-2 | 110 V (50+60 Hz) yellow |
| Number of poles | 4 |
| Clock hour position | 4 h |
| Identification colour | Yellow |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Construction type | Built-up device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

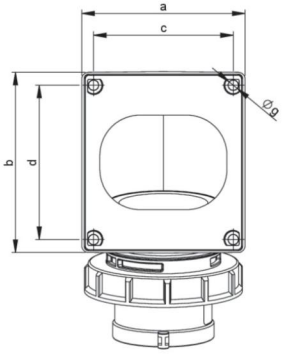


| | |
|---|---|
| a | 90 mm |
| b | 100 mm |
| c | 77 mm |
| d | 85 mm |
| e | 163 mm |
| f | 110 mm |
| g | 5 mm |
| wire flexible | 2,5-6 mm² |
| wire solid | 2,5-10 mm² |
| contact screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

https://www.pcelectric.at/shop/en/?func=detail&artnr=777242-4

Changes and printing errors reserved!



(C) PC ELECTRIC Ges.m.b.H. - Diesseits 145 - 4973 St. Martin i.l. - Austria - www.pcelectric.at