
article#	**25732-sr**
article description	**Safety connector lid nat LED IP54 red series TopTaurus2**
description long	Safety connector series TopTaurus2 with hinged lid color: black-red, material: PA6 2-component rubberized screwless quick lock system for housing cover and strain relief LED voltage indicator earthing system: Austrian/German 16A/ 250V AC / 3p (2P+E), protection rating: IP54
GTIN (EAN)	9003399487224
country of origin	AT
customs number	85366990
net weight	0.134 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 10.0	EC001327
Model	Coupler with protective contact CEE 7/3 (type F)
Material	Plastic
Material quality	Thermoplastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
With voltage indication	True
With quick-lock	True
Colour	Red
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True



K (cable Ø)	6-14 mm
SW	21 mm
wire flexible	1-2,5 mm²
contact screws	80 Ncm
strain relief	400 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C
IK-code *)	IK09

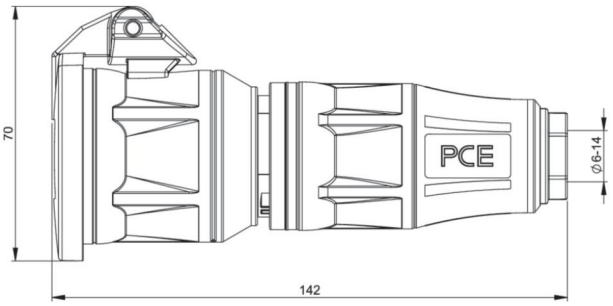

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

https://www.pcelectric.at/shop/en/?func=detail&artnr=25732-sr

Changes and printing errors reserved!

3/19/2026