


|                        |  |
|------------------------|--|
| article#               | <b>0341-9</b>  |
| article description    | <b>CEE-plug 63A 4p 9h IP44 POWER TWIST</b>   |
| description long       | CEE-plug 63A 4p 9h IP44 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 4 (3P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399670374  |
| country of origin      | AT   |
| customs number         | 85366990   |
| net weight             | 0.572 kg   |
| packaging quantity     | 2  |
| minimum order quantity | 2  |

|                                 |                           |
|---------------------------------|---------------------------|
| ETIM 9.0                        | EC000140                  |
| IEC-amperage                    | 63 A                      |
| Number of poles                 | 4                         |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position             | 9 h                       |
| Identification colour           | Blue                      |
| RAL-number                      | 7046                      |
| Degree of protection (IP)       | IP44                      |
| Connection system               | Screwed terminal          |
| Cable entry                     | Gland nut                 |
| Angle of plug                   | Straight                  |
| Material                        | Plastic                   |
| Contact material                | CuZn                      |
| Surface treatment contacts      | Nickel-plated             |

|                        |                      |
|------------------------|----------------------|
| a                      | 250 mm               |
| b                      | 102 mm               |
| c                      | 184 mm               |
| K (cable Ø)            | 14,5-36 mm           |
| SW                     | 61 mm                |
| wire flexible          | 6-16 mm <sup>2</sup> |
| contact screws         | 200 Ncm              |
| connecting screws      | 200 Ncm              |
| strain relief          | 1500 Ncm             |
| dismantling length     | 100 mm               |
| stripping length       | 15-18 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

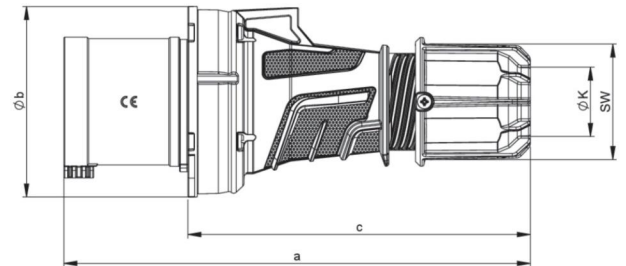

<https://www.pcelectric.at/shop/en/?func=detail&artnr=0341-9>

