


article#	11391-6
article description	CEE-receptacle wall mount 20A 2P3W 6h IP44 UL
description long	CEE-receptacle wall mount 20A 2P3W 6h IP44 UL (PCE320RS6S) housing material: PA6 rated current: 16A/20A number of poles: 2P3W (3p) clock position: 6h rated voltage: 250Vac contacts: brass connection technology: screw terminals IP protection class: IP44 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399879388
country of origin	AT
customs number	85366990
net weight	0.202 kg
packaging quantity	5
minimum order quantity	5

ETIM 9.0	EC001321
Model	Surface mounted
IEC-amperage	16 A
Amperage according to UL/CSA (for UL-version)	20 A
Clock hour position	6 h
Identification colour	Blue
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Gland nut
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Type of fastening	External mounting

a	5.63 inch
b	3.98 inch
wire flexible	16-12 AWG
wire solid	1-4 mm ²
contact screws	8.85 lbf-in
connecting screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.39-0.47 inch
temperature resistance	-13 – 176 °F

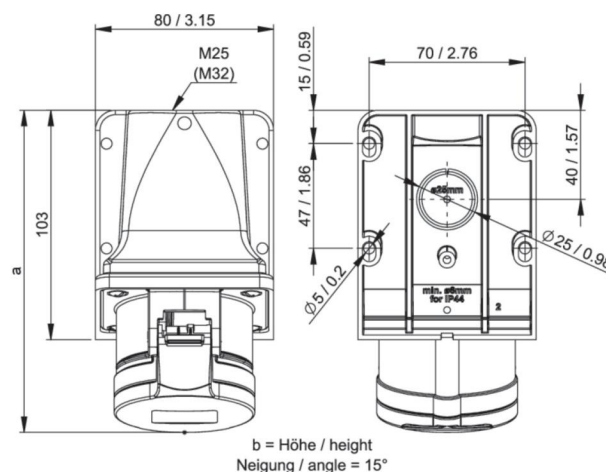

<https://www.pcelectric.at/shop/en/?func=detail&artnr=11391-6>

