


article#	12591-6
article description	CEE-receptacle wall mount 30A 4P5W 6h IP44 UL
description long	CEE-receptacle wall mount 30A 4P5W 6h IP44 UL (PCE530RS6S) housing material: PA6 rated current: 32A/30A number of poles: 4P5W (5p) clock position: 6h rated voltage: 200/346 - 240/415Vac contacts: brass connection technology: screw terminals IP protection class: IP44 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399947292
country of origin	AT
customs number	85366990
net weight	0.292 kg
packaging quantity	5
minimum order quantity	5

ETIM 9.0	EC001321
Model	Surface mounted
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Gland nut
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Type of fastening	External mounting

a	6.22 inch
b	4.53 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm ²
contact screws	9.74 lbf-in
connecting screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

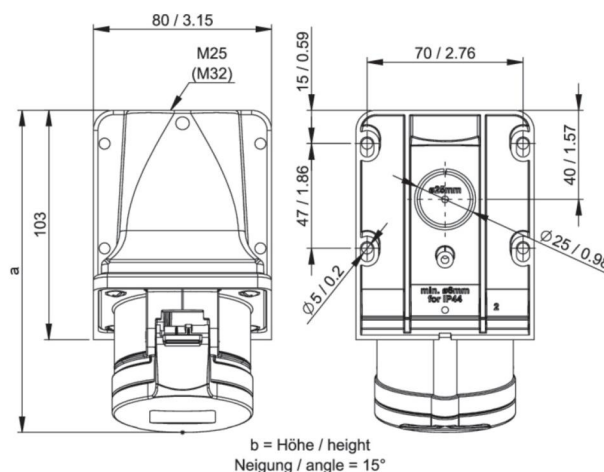

<https://www.pcelectric.at/shop/en/?func=detail&artnr=12591-6>

