


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>135-10</b>                                                                                                                                                                                                                                                                                                                                                                                                      |
| article description    | <b>CEE-wall mounted socket 63A 5p 10h IP67<br/>POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                                     |
| description long       | CEE-wall mounted socket 63A 5p 10h IP67<br>POWER TWIST<br>housing material: PC/ABS<br>rated current: 63A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 10h<br>rated voltage/frequency: >50V~ / 100-300Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>cable entry: top, bottom, rear<br>inc. threaded blind cap<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399998294                                                                                                                                                                                                                                                                                                                                                                                                      |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                 |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                           |
| net weight             | 0.923 kg                                                                                                                                                                                                                                                                                                                                                                                                           |
| packaging quantity     | 1                                                                                                                                                                                                                                                                                                                                                                                                                  |
| minimum order quantity | 1                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                 |                             |
|---------------------------------|-----------------------------|
| ETIM 9.0                        | EC001321                    |
| Model                           | Surface mounted             |
| IEC-ampereage                   | 63 A                        |
| Number of poles                 | 5                           |
| Voltage according to EN 60309-2 | 50-500 V (100-300 Hz) green |
| Clock hour position             | 10 h                        |
| Identification colour           | Green                       |
| Degree of protection (IP)       | IP67                        |
| Connection system               | Screwed terminal            |
| Cable entry                     | Gland nut                   |
| Material                        | Plastic                     |
| Contact material                | CuZn                        |
| Surface treatment contacts      | Untreated                   |
| Type of fastening               | External mounting           |
| Insulated mounting              | True                        |
| Military model                  | False                       |

|                        |                      |
|------------------------|----------------------|
| a                      | 213 mm               |
| b                      | 173 mm               |
| wire flexible          | 6-16 mm <sup>2</sup> |
| wire solid             | 6-25 mm <sup>2</sup> |
| contact screws         | 200 Ncm              |
| housing screws         | 200 Ncm              |
| dismantling length     | 100 mm               |
| stripping length       | 15-18 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

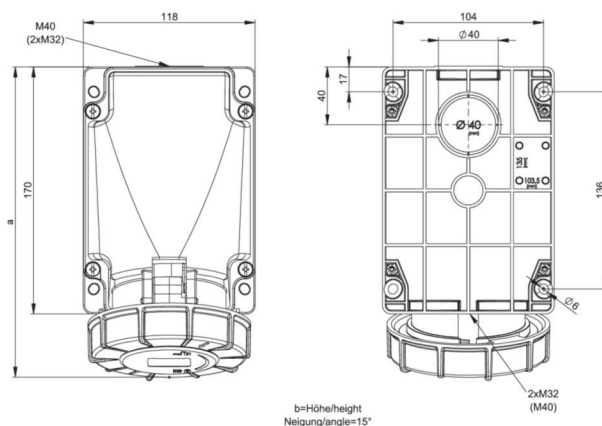

<https://www.pcelectric.at/shop/en/?func=detail&artnr=135-10>