


| | |
|------------------------|--|
| article# | 2153-6tt |
| article description | CEE-connector 16A 5p 6h IP54 GRIP TT |
| description long | CEE-connector 16A 5p 6h IP54 GRIP TT housing material: 2K (PA6/TPE) rated current: 16A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~/50+60Hz contacts: brass connection technology: screwless terminals (TT) IP protection class: IP44/IP54 |
| GTIN (EAN) | 9003399417344 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.215 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------------|----------------------|
| ETIM 9.0 | EC001320 |
| IEC-amperage | 16 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP54 |
| Connection system | Screw less terminal |
| Angle of plug | Straight |
| Cable entry | Gland nut |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

| | |
|------------------------|-----------------------|
| a | 168 mm |
| b | 117 mm |
| c | 93 mm |
| K (cable Ø) | 8-16 mm |
| SW | 42 mm |
| wire flexible | 1-2,5 mm ² |
| strain relief | 500 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

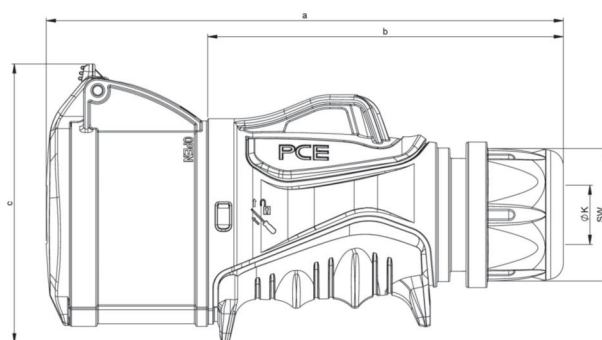

<https://www.pcelectric.at/shop/en/?func=detail&artnr=2153-6tt>