


article#	253712-sdgc
article description	3-way connector Taurus2 rubber hinged lid nat SH IP54 grey
description long	3-way connector Taurus2 rubber with hinged lid color housing/terminal-cover: black/grey contact carrier: polyamide ready wired on 3-pole terminal block (PH1) earthing system: Austrian/German with shutter (type F - with earth lug) contacts: nickel plated 250V~ / 16A / 2P+E internal strain relief with cable clamp and bend protection sleeve for serve conditions protection rating: IP54
country of origin	AT
customs number	85366990
packaging quantity	5
minimum order quantity	50

ETIM 9.0	EC001327
Model	Coupler CEE 7/3 (Typ F)
Material	Rubber
For heavy conditions according to VDE	True
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Colour	Grey
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A

K (cable Ø)	6-13 mm
wire flexible	1-2,5 mm ²
contact screws	50 Ncm
housing screws	160 Ncm
strain relief	80 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-5 – 40 °C

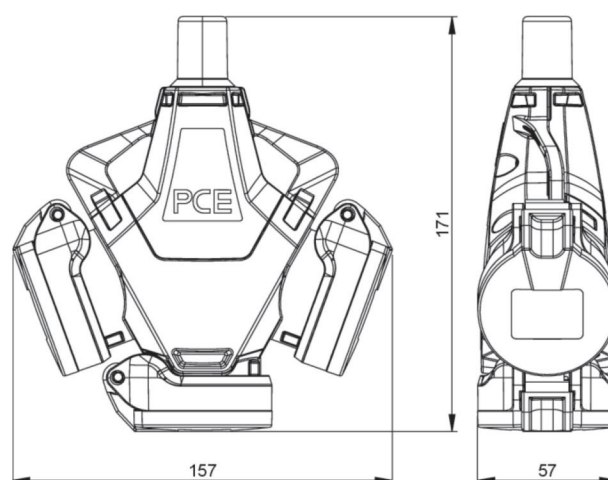

<https://www.pceelectric.at/shop/en/?func=detail&artnr=253712-sdgc>

