


article#	3149-5f7v
article description	CEE-receptacle flange 75x75 straight 20A 3P4W 5h IP44 UL
description long	CEE-receptacle flange 75x75 straight 20A 3P4W 5h IP44 UL (PCE420R5Sv) housing material: PA6 rated current: 20A number of poles: 3P4W (4p) clock position: 5h rated voltage: 600Vac contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 75x75mm / 60x60mm IP protection class: IP44 according to UL1682 UL-product category: QLIW / QLIW7 UL-file number: E252008
country of origin	AT
customs number	85366990
packaging quantity	10
minimum order quantity	10

ETIM 9.0	EC001317
Amperage according to UL/CSA (for UL-version)	20 A
Number of poles	4
Clock hour position	5 h
Identification colour	Black
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated
Flange size vertical	75 mm
Drill hole distance vertical	60 mm
Flange size horizontal	75 mm
Drill hole distance horizontal	60 mm

a	2.95 inch
b	2.95 inch
c	2.36 inch
d	2.36 inch
e	0.83 inch
f	2.17 inch
g	0.22 inch
h	1.77 inch
i	4.09 inch
j	3.98 inch
wire flexible	16-12 AWG
wire solid	1-4 mm ²
contact screws	8.85 lbf-in
dismantling length	1.97 inch
stripping length	0.39-0.47 inch
temperature resistance	-13 – 176 °F

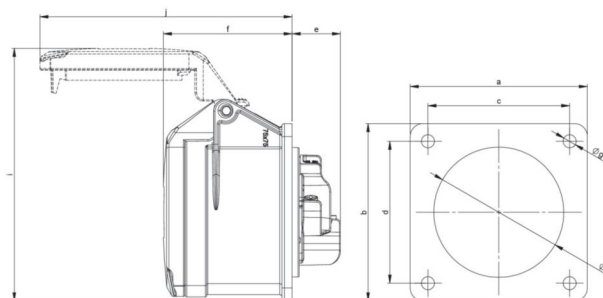

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3149-5f7v>