
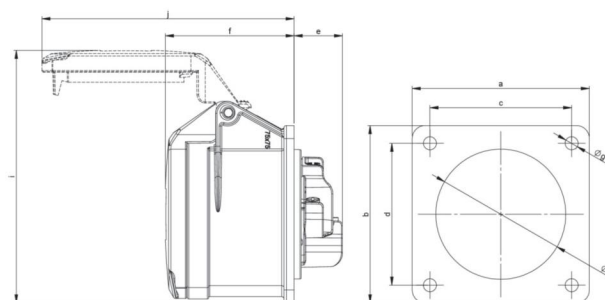


article#	3249-7f7
article description	CEE-receptacle flange 75x75 straight 30A 3P4W 7h IP44 UL
description long	CEE-receptacle flange 75x75 straight 30A 3P4W 7h IP44 UL (PCE430R7S) housing material: PA6 rated current: 30A number of poles: 3P4W (4p) clock position: 7h rated voltage: 480Vac contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 75x75mm / 60x60mm IP protection class: IP44 according to UL1682 UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399461699
country of origin	AT
customs number	85366990
net weight	0.182 kg
packaging quantity	10
minimum order quantity	10

ETIM 9.0	EC001317
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	4
Clock hour position	7 h
Identification colour	Red
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	75 mm
Drill hole distance vertical	60 mm
Flange size horizontal	75 mm
Drill hole distance horizontal	60 mm

a	2.95 inch
b	2.95 inch
c	2.36 inch
d	2.36 inch
e	0.91 inch
f	2.64 inch
g	0.22 inch
h	2.17 inch
i	4.41 inch
j	4.80 inch
wire flexible	14-10 AWG
wire solid	2,5-10 mm ²
contact screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

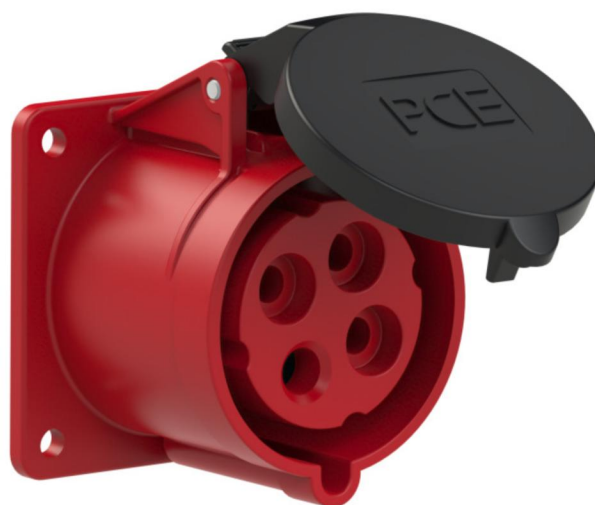

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3249-7f7>