
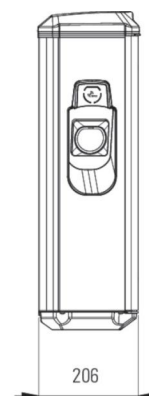




article#	353679
article description	TWINBOX GTB 2x11kW, cable Type2, RCD A+ energy meter
description long	TWINBOX GTB - Charging Station for Electric Vehicles Connection: (230)400V AC, 50Hz, (1)3-phase Number of charging units: 2 fixed charging cable 4m with Type 2 connector Max. power per charging point: 11kW Nominal connection power: 22kW WxHxD: 377x660x213 mm Mounting method: Wall mounting Protection: RCCB Type A+ integr. DC-fault protection (6mA) MCB C 32A 4 pole Access control: no Communication interface: no integrated modbus energy meter, certified acc. to MID directive Material housing: aluminium/black Degree of protection: IP44 Impact strength: IK10 Ambient temperature: -25°C bis +40°C Standards: EN 61851-1, IEC 61439-7 Adjustable charging current: 6A, 10A, 13A, 16A, 20A, 25A, 32A
GTIN (EAN)	9003399494529
country of origin	SE
customs number	85371098
net weight	15.000 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC002883
Installation side connection model	3-phase
Input voltage	400 – 400 V
Frequency	50 Hz
Nominal connection power	22 kW
Number of charging units	2
Max. power per charging point	11 kW
Width	377 mm
Height	660 mm
Depth	213 mm
Mounting method	Wall mounting
Number of vehicle connectors Type 2	5
Number of earth leakage circuit breakers type A	1
Length of charging cable	4 m
Charging cable permanently lockable at charging device	False
DC residual current detection	True
Contactor welding detection	False
With circuit breaker	True
Network-enabled as a master	True
Network-enabled as an extender	True
Networkable via LAN	True
Networkable via Wi-Fi	False
LTE	False
With energy meter	True
With built-in RFID card reader	False
NFC (Near Field Communication)	False
Static load management integrated	True

Suitable for dynamic load management

True


<https://www.pcelectric.at/shop/en/?func=detail&artnr=353679>