

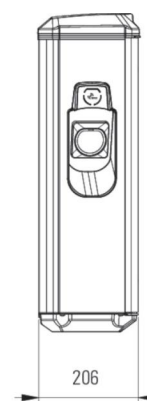



| | |
|------------------------|---|
| article# | 353983P |
| article description | TWINBOX PCE GTB+ DC Typ2FC11kW 4G Z RFID |
| description long | TWINBOX GTB+ Charging Station for Electric Vehicles Connection: (230)400V AC, 50Hz, (1)3 phases Number of charging units: 2 fixed charging cable 4m with Type 2 connector Max. power per charging point: 11kW Nominal connection power: 22kW WxHxD: 377x660x213 mm Mounting method: Wall mounting Protection: RCCB Type A + integr. DC-fault protection (6mA) MCB C 16A 4 pole Access control: RFID Controller: CC612 charge controller Communication interface: 4G-modules Communication: OCPP 1.6 JSON, Modbus TCP Backendsystem: no preconfiguration integrated modbus energy meter, certified acc. to MID directive Material housing: aluminium / black Degree of protection: IP44 Impact strength: IK10 Ambient temperature: -25°C bis +40°C Standards: accord. to EN 61851-1, IEC 61439-7 |
| GTIN (EAN) | 9003399517938 |
| country of origin | SE |
| customs number | 85371098 |
| net weight | 15.000 kg |
| packaging quantity | 0 |
| minimum order quantity | 1 |

| | |
|--|---------------|
| ETIM 9.0 | EC002883 |
| Installation side connection model | 3-phase |
| Input voltage | 400 – 400 V |
| Frequency | 50 Hz |
| Nominal connection power | 22 kW |
| Number of charging units | 2 |
| Max. power per charging point | 11 kW |
| Width | 377 mm |
| Height | 660 mm |
| Depth | 213 mm |
| Mounting method | Wall mounting |
| Number of vehicle connectors Type 2 | 5 |
| Number of earth leakage circuit breakers type A | 2 |
| Length of charging cable | 4 m |
| Charging cable permanently lockable at charging device | False |
| DC residual current detection | True |
| Contactor welding detection | False |
| With circuit breaker | True |
| Network-enabled as a master | True |
| Network-enabled as an extender | True |
| Networkable via LAN | True |
| Networkable via Wi-Fi | True |
| LTE | True |
| With energy meter | True |
| With built-in RFID card reader | True |
| NFC (Near Field Communication) | True |

| | |
|---|-------|
| Static load management integrated | False |
| Suitable for dynamic load management | True |
| Open Charge Point Protocol (OCPP) version | 1.6 |



<https://www.pcelectric.at/shop/en/?func=detail&artnr=353983P>