


article#	41592-6f78
article description	CEE-receptacle flange 80x97 angled 20A 4P5W 6h IP67 UL
description long	CEE-receptacle flange 80x97 angled 20A 4P5W 6h IP67 UL (PCE520RA6W) housing material: PA6 rated current: 16A/20A number of poles: 4P5W (5p) clock position: 6h rated voltage: 200/346 - 240/415Vac contacts: brass connection technology: screw terminals dimensions (flange/fixing center): 80x97mm / 60x73mm IP protection class: IP67 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
GTIN (EAN)	9003399432903
country of origin	AT
customs number	85366990
net weight	0.186 kg
packaging quantity	10
minimum order quantity	10

ETIM 9.0	EC001317
IEC-amperage	16 A
Amperage according to UL/CSA (for UL-version)	20 A
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated
Flange size vertical	97 mm
Drill hole distance vertical	73 mm
Flange size horizontal	80 mm
Drill hole distance horizontal	60 mm

a	3.15 inch
b	3.82 inch
c	2.36 inch
d	2.87 inch
e	1.50 inch
f	2.17 inch
g	2.56 inch
h	2.99 inch
i	0.22 inch
j	4.49 inch
k	4.69 inch
wire flexible	16-12 AWG
wire solid	1-4 mm²
contact screws	8.85 lbf-in
dismantling length	1.97 inch
stripping length	0.39-0.47 inch
temperature resistance	-13 – 176 °F

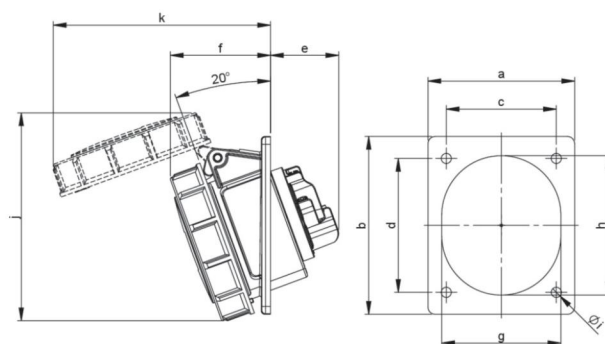

<https://www.pcelectric.at/shop/en/?func=detail&artnr=41592-6f78>

