


article#	42592-6f78v
article description	CEE-receptacle flange 80x97 angled 30A 4P5W 6h IP67 UL
description long	CEE-receptacle flange 80x97 angled 30A 4P5W 6h IP67 UL (PCE530RA6Wv) housing material: PA6 rated current: 32A/30A number of poles: 4P5W (5p) clock position: 6h rated voltage: 200/346 - 240/415Vac contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 80x97mm / 60x73mm IP protection class: IP67 according to UL1682 und IEC/EN 60309-2 (SERIE II) UL-product category: QLIW / QLIW7 UL-file number: E252008
country of origin	AT
customs number	85366990
packaging quantity	10
minimum order quantity	10

ETIM 9.0	EC001317
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated
Flange size vertical	97 mm
Drill hole distance vertical	73 mm
Flange size horizontal	80 mm
Drill hole distance horizontal	60 mm

a	3.15 inch
b	3.82 inch
c	2.36 inch
d	2.87 inch
e	1.89 inch
f	2.40 inch
g	2.76 inch
h	3.31 inch
i	0.22 inch
j	5.00 inch
k	5.24 inch
wire flexible	14-10 AWG
wire solid	2.5-10 mm ²
contact screws	9.74 lbf-in
dismantling length	1.97 inch
stripping length	0.47-0.55 inch
temperature resistance	-13 – 176 °F

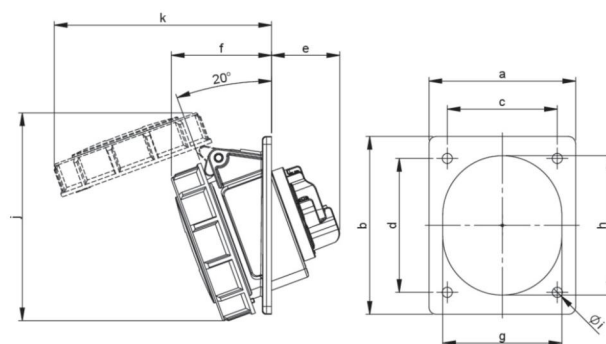

<https://www.pcelectric.at/shop/en/?func=detail&artnr=42592-6f78v>