
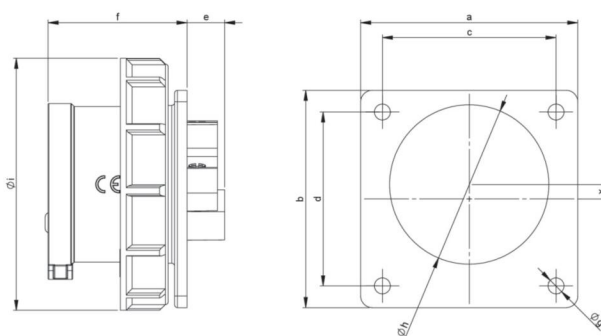


|                        |                                                                                                                                                                                                                                                                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>6142-2</b>                                                                                                                                                                                                                                                                                                                                            |
| article description    | <b>CEE-flanged plug 75x75 straight 16A 4p 2h IP67</b>                                                                                                                                                                                                                                                                                                    |
| description long       | CEE-flanged plug 75x75 straight 16A 4p 2h IP67<br>housing material: PA6<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 2h<br>rated voltage/frequency: >50V~ / 300-500Hz<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 75x75 mm / 60x60 mm<br>IP protection class: IP66/IP67 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                       |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                 |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                       |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                       |

|                                 |                              |
|---------------------------------|------------------------------|
| ETIM 9.0                        | EC001319                     |
| IEC-amperage                    | 16 A                         |
| Voltage according to EN 60309-2 | 50-500 V (>300-500 Hz) green |
| Number of poles                 | 4                            |
| Clock hour position             | 2 h                          |
| Identification colour           | Green                        |
| Degree of protection (IP)       | IP67                         |
| Connection system               | Screwed terminal             |
| Construction type               | Built-up device plug         |
| Angle of plug                   | Straight                     |
| Material                        | Plastic                      |
| Contact material                | CuZn                         |
| Surface treatment contacts      | Untreated                    |

|                        |                       |
|------------------------|-----------------------|
| a                      | 75 mm                 |
| b                      | 75 mm                 |
| c                      | 60 mm                 |
| d                      | 60 mm                 |
| e                      | 14 mm                 |
| f                      | 48 mm                 |
| g                      | 5,5 mm                |
| h                      | 44 mm                 |
| i                      | 79 mm                 |
| x                      | 6 mm                  |
| wire flexible          | 1-2,5 mm <sup>2</sup> |
| wire solid             | 1-4 mm <sup>2</sup>   |
| contact screws         | 100 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 10-12 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |

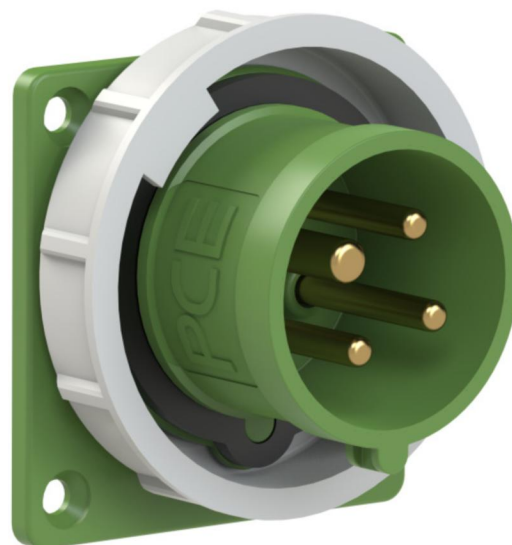

<https://www.pcelectric.at/shop/en/?func=detail&artnr=6142-2>