


|                        |                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>6341-10k</b>                                                                                                                                                                                                                                                                                                                                                                                         |
| article description    | <b>CEE-flanged plug straight 63A 4p 10h IP44 POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                            |
| description long       | CEE-flanged plug straight 63A 4p 10h IP44 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 4 (3P+PE)<br>clock-position: 10h<br>rated voltage/frequency: >50V~ / 100-300Hz<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x100 mm / 80x80 mm<br>IP protection class: IP44 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                      |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                       |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                       |

|                                 |                             |
|---------------------------------|-----------------------------|
| ETIM 9.0                        | EC001319                    |
| IEC-amperage                    | 63 A                        |
| Voltage according to EN 60309-2 | 50-500 V (100-300 Hz) green |
| Number of poles                 | 4                           |
| Clock hour position             | 10 h                        |
| Identification colour           | Green                       |
| Degree of protection (IP)       | IP44                        |
| Connection system               | Screwed terminal            |
| Construction type               | Built-up device plug        |
| Angle of plug                   | Straight                    |
| Material                        | Plastic                     |
| Contact material                | CuZn                        |
| Surface treatment contacts      | Nickel-plated               |

|                        |                      |
|------------------------|----------------------|
| a                      | 100 mm               |
| b                      | 100 mm               |
| c                      | 80 mm                |
| d                      | 80 mm                |
| e                      | 39 mm                |
| f                      | 73 mm                |
| g                      | 7 mm                 |
| h                      | 77 mm                |
| wire flexible          | 6-16 mm <sup>2</sup> |
| wire solid             | 6-25 mm <sup>2</sup> |
| contact screws         | 200 Ncm              |
| dismantling length     | 100 mm               |
| stripping length       | 15-18 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

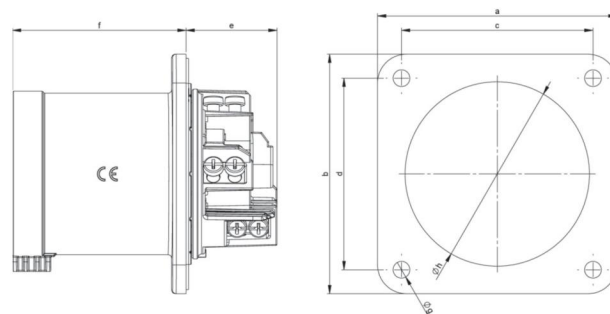

<https://www.pceelectric.at/shop/en/?func=detail&artnr=6341-10k>