


|                        |  |
|------------------------|--|
| article#               | <b>7414-9</b>  |
| article description    | <b>CEE-phase inverter angled plug 16A 4p 9h IP44 TWIST</b>   |
| description long       | CEE-phase inverter angled plug 16A 4p 9h IP44 TWIST<br>housing material: PA6<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 9h<br>rated voltage/frequency: 200-250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>IP protection class: IP44 |
| country of origin      | AT   |
| customs number         | 85366990   |
| packaging quantity     | 10   |
| minimum order quantity | 10   |

|                                 |                           |
|---------------------------------|---------------------------|
| ETIM 9.0                        | EC000140                  |
| IEC-ampereage                   | 16 A                      |
| Number of poles                 | 4                         |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position             | 9 h                       |
| Identification colour           | Blue                      |
| Phase inverter                  | True                      |
| Degree of protection (IP)       | IP44                      |
| Connection system               | Screwed terminal          |
| Cable entry                     | Gland nut                 |
| Angle of plug                   | Angled                    |
| Material                        | Plastic                   |
| Contact material                | CuZn                      |
| Surface treatment contacts      | Nickel-plated             |

|                        |                       |
|------------------------|-----------------------|
| a                      | 98 mm                 |
| b                      | 62 mm                 |
| c                      | 53 mm                 |
| d                      | 87 mm                 |
| e                      | 15 °                  |
| K (cable Ø)            | 6-15 mm               |
| SW                     | 38 mm                 |
| wire flexible          | 1-2,5 mm <sup>2</sup> |
| contact screws         | 100 Ncm               |
| strain relief          | 500 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 10-12 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |



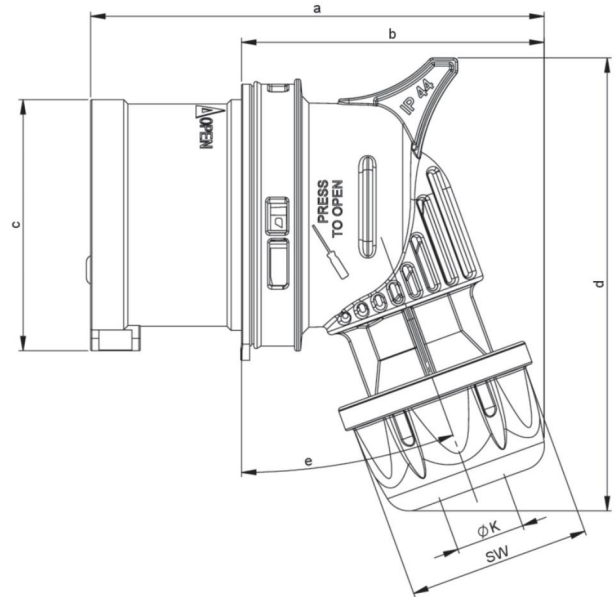



<https://www.pcelectric.at/shop/en/?func=detail&artnr=7414-9>