


|                        |                                                                                                                                                                                                                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>77725-9ttv</b>                                                                                                                                                                                                                                                                                                              |
| article description    | <b>CEE-flanged plug angled 32A 5p 9h IP44 TT</b>                                                                                                                                                                                                                                                                               |
| description long       | CEE-flanged plug angled 32A 5p 9h IP44 TT<br>housing material: PC/ABS<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screwless terminals (TT)<br>IP protection class: IP44 |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                             |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                       |
| packaging quantity     | 5                                                                                                                                                                                                                                                                                                                              |
| minimum order quantity | 5                                                                                                                                                                                                                                                                                                                              |

|                                 |                           |
|---------------------------------|---------------------------|
| ETIM 9.0                        | EC001319                  |
| IEC-amperage                    | 32 A                      |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Number of poles                 | 5                         |
| Clock hour position             | 9 h                       |
| Identification colour           | Blue                      |
| Degree of protection (IP)       | IP44                      |
| Connection system               | Screw less terminal       |
| Construction type               | Built-up device plug      |
| Angle of plug                   | Angled                    |
| Material                        | Plastic                   |
| Contact material                | CuZn                      |
| Surface treatment contacts      | Nickel-plated             |

|                        |                        |
|------------------------|------------------------|
| a                      | 90 mm                  |
| b                      | 100 mm                 |
| c                      | 77 mm                  |
| d                      | 85 mm                  |
| e                      | 164 mm                 |
| f                      | 103 mm                 |
| g                      | 5 mm                   |
| wire flexible          | 2,5-6 mm <sup>2</sup>  |
| wire solid             | 2,5-10 mm <sup>2</sup> |
| dismantling length     | 50 mm                  |
| stripping length       | 12-14 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

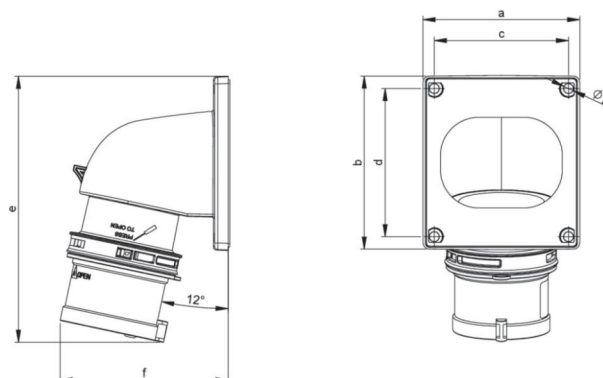

<https://www.pcelectric.at/shop/en/?func=detail&artnr=77725-9ttv>