


| | |
|------------------------|---|
| article# | 80132-6ttv |
| article description | CEE angled plug 16A 3p 6h IP67 TT TWIST |
| description long | CEE angled plug 16A 3p 6h IP67 TT TWIST housing material: PA6 rated current: 16A number of poles: 3 (2P+PE) clock-position: 6h rated voltage/frequency: 200-250V~ / 50+60Hz contacts: brass nickel plated connection technology: screwless terminals (TT) IP protection class: IP67 |
| GTIN (EAN) | 9003399617140 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.130 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------------|-----------------------|
| ETIM 9.0 | EC000140 |
| IEC-amperage | 16 A |
| Number of poles | 3 |
| Voltage according to EN 60309-2 | 230 V (50+60 Hz) blue |
| Clock hour position | 6 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screw less terminal |
| Cable entry | Gland nut |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

| | |
|------------------------|-----------------------|
| a | 98 mm |
| b | 71 mm |
| c | 92 mm |
| d | 15 ° |
| K (cable Ø) | 6-15 mm |
| SW | 38 mm |
| wire flexible | 1-2,5 mm ² |
| strain relief | 500 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

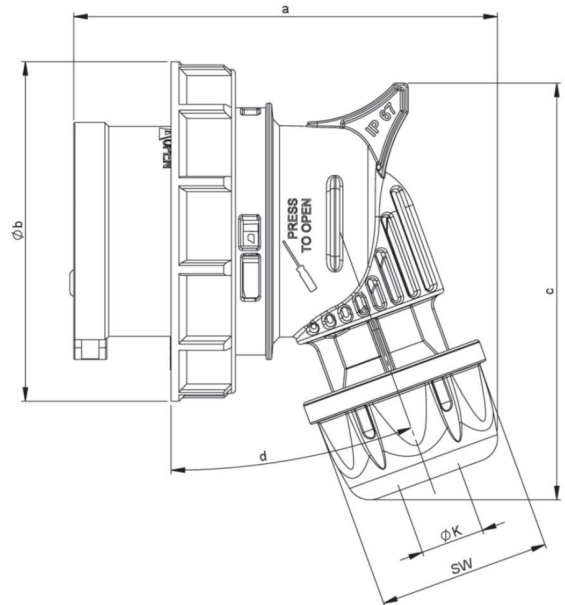

<https://www.pcelectric.at/shop/en/?func=detail&artnr=80132-6ttv>