


| | |
|------------------------|---|
| article# | 8014-9 |
| article description | CEE angled plug 16A 4p 9h IP44 TWIST |
| description long | CEE angled plug 16A 4p 9h IP44 TWIST housing material: PA6 rated current: 16A number of poles: 4 (3P+PE) clock-position: 9h rated voltage/frequency: 200-250V~ / 50+60Hz contacts: brass connection technology: screw terminals IP protection class: IP44 |
| GTIN (EAN) | 9003399982880 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.130 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------------|---------------------------|
| ETIM 9.0 | EC000140 |
| IEC-amperage | 16 A |
| Number of poles | 4 |
| Voltage according to EN 60309-2 | 200-250 V (50+60 Hz) blue |
| Clock hour position | 9 h |
| Identification colour | Blue |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

| | |
|------------------------|-----------------------|
| a | 98 mm |
| b | 62 mm |
| c | 53 mm |
| d | 91 mm |
| e | 15 ° |
| K (cable Ø) | 6-15 mm |
| SW | 38 mm |
| wire flexible | 1-2,5 mm ² |
| contact screws | 100 Ncm |
| strain relief | 500 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

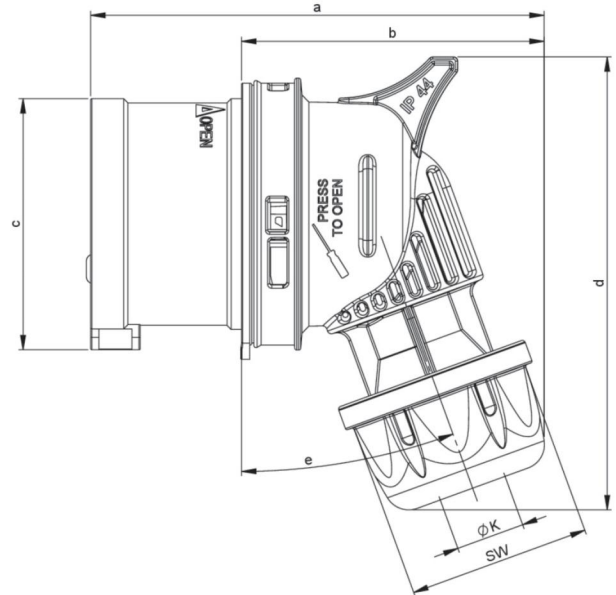

<https://www.pcelectric.at/shop/en/?func=detail&artnr=8014-9>

