


article#	9250010-p
article description	XREEL250 3xSSD54k 25m3G1.5PUR VGS2 K2
description long	Cable Reel XREEL250 Reel (black) with central, internal locking mechanism Protected connecting area Solid carrying rack (black) with ergonomic handle and 2 parking positions for the plug Central plate with 3 pcs safety machine sockets national version with self-closing hinged lids and sealing edge (105-0bsw) Rated operating voltage: 250V Rated current: 16A Protection rating: IP54 1 pcs thermal circuit breaker 25m Orange cable H07BQ-F 3G1.5mm² Taurus2 solid rubber plug 16A 2p+PE 2SL 250V IP54 (0522-sr) XREEL250 installed ready for use complies with RoHS directive 2011/65/EU low voltage directive NSpRI 2014/35/EU UV stability according ISO 4892-2 Standard: IEC / EN 61242 Conform with BGI608 K2
GTIN (EAN)	9003399295393
country of origin	PL
customs number	85444290
net weight	4.000 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC000191
Material housing	Plastic
Cable assembly	H07BQ-F
Core cross section	1.5 mm ²
Number of cores	3
Number of socket outlets with protective contact CEE 7/3 (type F)	3
Type of mains connection	Plug CEE 7/4 (type F)
Cable length	25 m
With mounting frame	True
With thermal overload protection	True
With locking	True
Degree of protection (IP)	IP54
Colour	Black

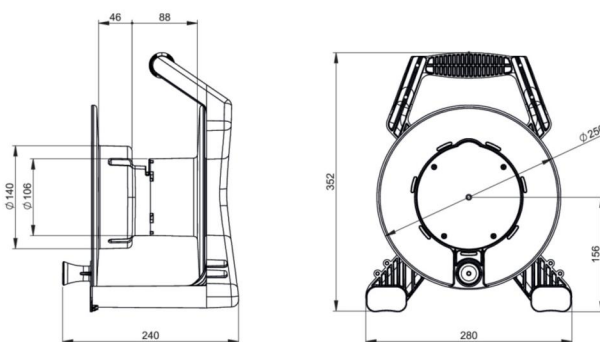

<https://www.pcelectric.at/shop/en/?func=detail&artnr=9250010-p>