


article#	9250016-p
article description	XREEL250 4xSSD54 25m3G2.5N07 VGS2
description long	Cable Reel XREEL250 Reel (black) with central, internal locking mechanism Protected connecting area Solid carrying rack (black) with ergonomic handle Central plate with 4 pcs safety sockets national version with self-closing hinged lids and shutter Rated operating voltage: 250V Rated current: 16A Protection rating: IP54 1 pcs thermal circuit breaker 1 pcs power supply light (green) 25m Yellow cable N07V3V3-F 3G2.5mm2 Taurus2 solid rubber plug 16A 2p+PE 2SL 250V IP54 (0522-sr) XREEL250 installed ready for use complies with RoHS directive 2011/65/EU low voltage directive NSpRI 2014/35/EU UV stability according ISO 4892-2 acc standard IEC/EN 61242 Protection rating complete system: IP54
GTIN (EAN)	9003399304637
country of origin	PL
customs number	85444290
net weight	6.600 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC000191
Material housing	Plastic
Cable assembly	Other
Core cross section	2.5 mm²
Number of cores	3
Number of socket outlets with protective contact CEE 7/3 (type F)	4
Type of mains connection	Plug CEE 7/4 (type F)
Cable length	25 m
With mounting frame	True
With thermal overload protection	True
With locking	True
Degree of protection (IP)	IP54
Colour	Black

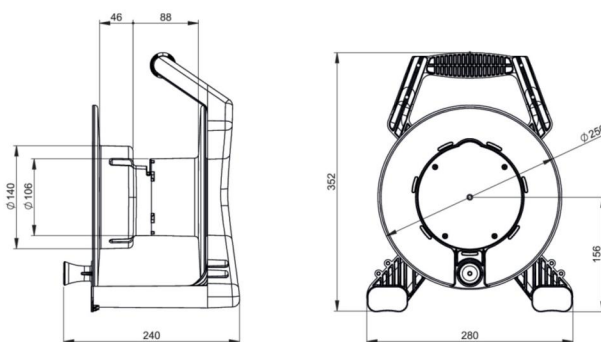

<https://www.pcelectric.at/shop/en/?func=detail&artnr=9250016-p>