


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>9250026-p</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| article description    | <b>XREEL250 3xSSD54k 33m3G1.5PUR VGS2 K2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| description long       | <p>Cable Reel XREEL250</p> <p>Reel (black) with central, internal locking mechanism</p> <p>Protected connecting area</p> <p>Solid carrying rack (black) with ergonomic handle and</p> <p>2 parking positions for the plug</p> <p>Central plate with 3 pcs safety machine sockets</p> <p>national version with self-closing hinged lids and sealing edge (105-0bsw)</p> <p>Rated operating voltage: 250V</p> <p>Rated current: 16A</p> <p>Protection rating: IP54</p> <p>1 pcs thermal circuit breaker</p> <p>33m Orange cable H07BQ-F 3G1.5mm2</p> <p>Taurus2 solid rubber plug 16A 2p+PE 2SL 250V IP54 (0522-sr)</p> <p>XREEL250 installed ready for use</p> <p>complies with RoHS directive 2011/65/EU</p> <p>low voltage directive NSpRI 2014/35/EU</p> <p>UV stability according ISO 4892-2</p> <p>Standard: IEC / EN 61242</p> <p>Conform with BGI608 K2</p> |
| GTIN (EAN)             | 9003399320439                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| country of origin      | PL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| customs number         | 85444290                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| net weight             | 5.100 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| packaging quantity     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                                                                   |                       |
|-------------------------------------------------------------------|-----------------------|
| ETIM 9.0                                                          | EC000191              |
| Material housing                                                  | Plastic               |
| Cable assembly                                                    | H07BQ-F               |
| Core cross section                                                | 1.5 mm <sup>2</sup>   |
| Number of cores                                                   | 3                     |
| Number of socket outlets with protective contact CEE 7/3 (type F) | 3                     |
| Type of mains connection                                          | Plug CEE 7/4 (type F) |
| Cable length                                                      | 33 m                  |
| With mounting frame                                               | True                  |
| With thermal overload protection                                  | True                  |
| With locking                                                      | True                  |
| Degree of protection (IP)                                         | IP54                  |
| Colour                                                            | Black                 |

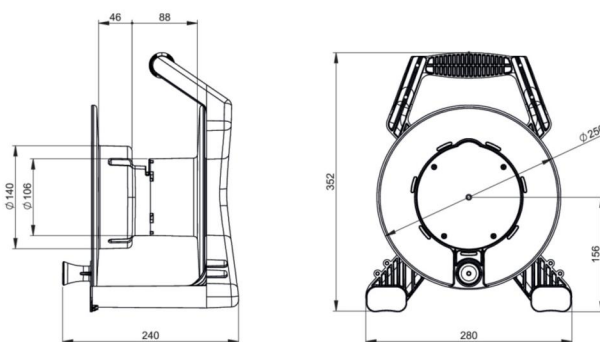

<https://www.pcelectric.at/shop/en/?func=detail&artnr=9250026-p>