


article#	9250033-p
article description	XREEL250 3xSSD54k 30m3G1.5PUR VGS2 K2
description long	Cable Reel XREEL250 Reel (black) with central, internal locking mechanism Protected connecting area Solid carrying rack (black) with ergonomic handle Central plate with 3 pcs safety machine sockets national version with self-closing hinged lids and sealing edge (105-0bsw) Rated operating voltage: 250V Rated current: 16A Protection rating: IP54 1 pcs thermal circuit breaker 30m Orange cable H07BQ-F 3G1.5mm2 Taurus2 solid rubber plug 16A 2p+PE 2SL 250V IP54 (0522-sr) Cable reel installed ready for use complies with RoHS directive 2011/65/EU low voltage directive NSpRI 2014/35/EU UV stability according ISO 4892-2 acc standard IEC/EN 61242 Protection rating complete system: IP54 Conform with BGI608 K2
GTIN (EAN)	9003399354014
country of origin	PL
customs number	85444290
net weight	4.600 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC000191
Material housing	Plastic
Cable assembly	H07BQ-F
Core cross section	1.5 mm ²
Number of cores	3
Number of socket outlets with protective contact CEE 7/3 (type F)	3
Type of mains connection	Plug CEE 7/4 (type F)
Cable length	30 m
With mounting frame	True
With thermal overload protection	True
With locking	True
Degree of protection (IP)	IP54
Colour	Black

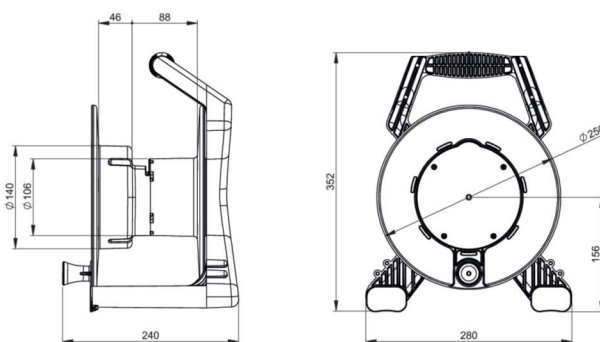

<https://www.pcelectric.at/shop/en/?func=detail&artnr=9250033-p>