


article#	9250035-p
article description	XREEL250 16/3 SSD54k 20m3G2.5H07 16/3 K2
description long	Cable Reel XREEL250 Reel (black) with central, internal locking mechanism Protected connecting area Solid carrying rack (black) with ergonomic handle Central plate with 1 CEE flanged socket straight 16/3 6h (313-6f5) and 1 safety machine socket national version with self-closing hinged lid and sealing edge (105-0bsw) Rated operating voltage: 230V Rated current: 16A Protection rating: IP54 1 pcs thermal circuit breaker 20m Black cable H07RN-F 3G2.5mm2 CEE plug 16/3 6h IP44 nickel plated (013-6v) Cable reel installed ready for use complies with RoHS directive 2011/65/EU low voltage directive NSpRI 2014/35/EU UV stability according ISO 4892-2 acc standard IEC/EN 61316 Protection rating complete system: IP54 Conform with BGI608 K2
GTIN (EAN)	9003399383052
country of origin	PL
customs number	85444290
net weight	5.700 kg
packaging quantity	1
minimum order quantity	1

ETIM 9.0	EC000191
Material housing	Plastic
Cable assembly	H07RN-F
Core cross section	2.5 mm ²
Number of cores	3
Number of CEE socket outlets	2
Type of mains connection	CEE
Cable length	20 m
With mounting frame	True
With thermal overload protection	True
With locking	True
Degree of protection (IP)	IP54
Colour	Black

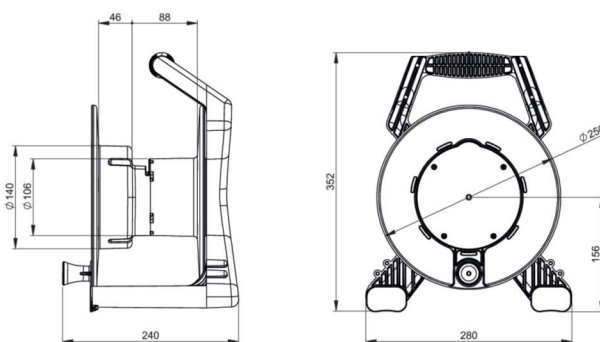

<https://www.pcelectric.at/shop/en/?func=detail&artnr=9250035-p>