



ÖVE-CERTIFICATE

including the entitlement to use the Austrian Safety Mark



Certificate No.: **43-255-00**

Valid from: 2023 12 21
until: 2025 12 21

The Austrian Electrotechnical Association (OVE) hereby grants the right to the company mentioned below to label the listed products with the Austrian Safety Mark.

Certificate holder: **PC Electric Ges.m.b.H.**
Diesseits 145
4973 St. Martin im Innkreis
Austria

Product: **Rewirable 3-way portable socket outlet with side earthing contacts**

The products submitted by the applicant were type tested in accordance with the requirements of the technical standards and specifications listed in this certificate. OVE certifies the conformity of the listed products and those products manufactured strictly identical to the submitted ones (EN ISO/IEC 17067, Conformity Assessment Scheme Type 5).

The manufacturing process and the products are subject to ongoing surveillance based on harmonized European procedures. This certificate has been issued under the presumption and conditional on the fact that the certificate holder holds all necessary legal rights with regard to the product, presented for the testing and certification.

Results of testing are shown in file No(s): **TGM-VA EE 39444**

Österreichischer Verband für Elektrotechnik
Head of OVE Certification

T. Neumayer
Digitally signed by T. Neumayer
Email=t.neumayer@ove.at



Wien, 2023 12 21

Dipl.-Ing. T. Neumayer

OVE Certification

Accredited by the Austrian National Accreditation Body as Certification Body for products within the scope as given in the official decree and published under <https://akkreditierung-austria.gv.at>.



Manufacturer:

PC Electric Ges.m.b.H.
Diesseits 145
4973 St. Martin im Innkreis
Austria

Factory location(s):

PC Electric Ges.m.b.H.
Diesseits 145
4973 St. Martin im Innkreis
Austria

Tested and certified according to:

OVE E 8684-1:2019-12-01
ÖVE/ÖNORM EN 60669-2-1:2010-10-01 (Cl. 23, 24, 101) for types with indicator lamp

Product: Rewirable 3-way portable socket outlet with side earthing contacts

Type designation:

Rating:

Trademark:

253

Rated voltage: AC 250 V
Rated power: 3680 W 2h; 2450 W 24h/7d max.
Rated current: 16 A
IP54
see typecode

PCE / ELCEE

253 5pol

Rated voltage: AC 400 V (socket-outlets 250 V)
Rated power: 3x 3680 W 2h max; 3x 2450 W 24h/7d max.
Rated current: 16 A
IP54
see typecode


PCE / ELCEE

OVE Certification

Accredited by the Austrian National Accreditation Body as Certification Body for products within the scope as given in the official decree and published under <https://akkreditierung-austria.gv.at>.

Typecode

253 . . . -

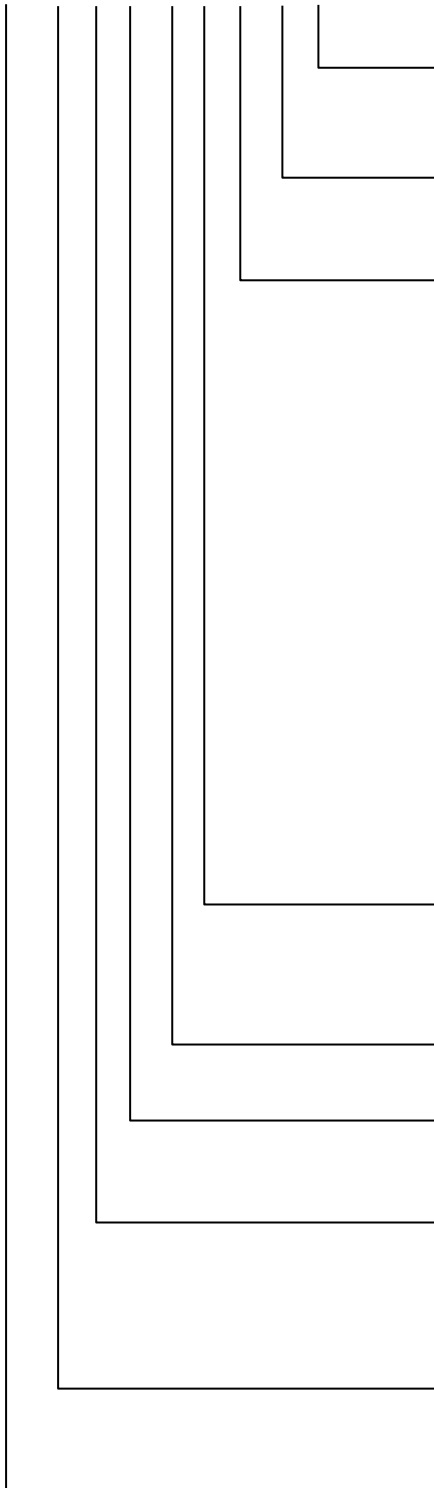

Poles

- blank - 3-pole
- 5 - 5-pole

Shutter

- blank - without Shutter
- c - with Shutter (only with contact carrying part out of PA6)

Colour of connection cover

- r - red
- s - black
- b - blue
- hb - light blue
- hu - fluorescent green
- e - yellow
- .u - green RAL 6031 F9
- g - gray
- dg - dark gray
- o - orange
- su - siemens green
- u - green
- w - white
- v - violet
- a - anthracite
- p - pink
- ob - brown
- ho - fluorescent orange
- * - reserved for different colours

Colour housing part

- s - black
- b - blue
- * - reserved for different colours

Customer type

- - PCE

Degree of protection

- 1 - lid capative (IP54)
- 2 - hinged lid (IP54)

Contact carrier

- 1 - contact carrier made of PA6
- 2 - contact carrier made of TPE
- 3 - contact carrier made of PA6 with LED
- 4 - contact carrier made of TPE with LED

Cord anchorage

- 7 - intern cord anchorage (screw and bell)
- 8 - extern cord anchorage (cord anchorage nut)

Basic type

- 253 - 3-way connector with side earthing contacts

OVE Certification

Accredited by the Austrian National Accreditation Body as Certification Body for products within the scope as given in the official decree and published under <https://akkreditierung-austria.gv.at>.

