
article#	**1050-0bsc**
article description	**Safety socket P-NOVA+, 50x50 Austrian/German shutter IP54 side (blue)**
description long	Safety socket series P-NOVA plus housing material: PA6 color: blue flange dimension: 50x50mm connection technology: screw terminal cable entry: side entry system: Austrian/German with shutter contacts: nickel plated 250V, 16A, 2P+E protection class: IP54
GTIN (EAN)	9003399020308
country of origin	LK
customs number	85366990
net weight	0.045 kg
packaging quantitiy	100
minimum order quantitiy	100





ETIM 9.0	EC001325
Model	Socket outlet CEE 7/3 (type F)
Material	Plastic
Material quality	Thermoplastic
Halogen free	True
Flange size	50x50 mm
With hinged lid	True
For heavy conditions according to VDE	True
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Colour	Blue
Number of poles	3
Nominal current	16 A
Nominal voltage	250 V

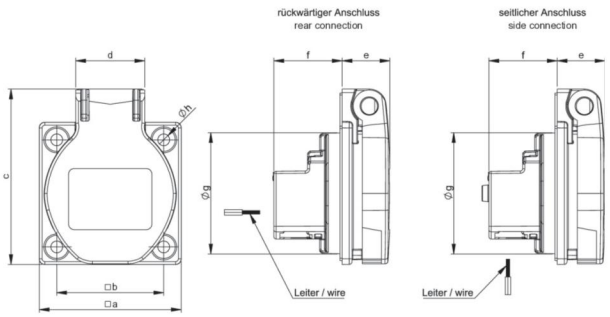

a	50,5 mm
b	38 mm
c	62 mm
d	25 mm
e	18 mm
f	24 mm
g	43 mm
h	4,2 mm
wire flexible	1,5-2x2,5 mm²
wire solid	1,5-2x2,5 mm²
contact screws	80 Ncm
stripping length	8-10 mm
ambient temperature	-25 – 40 °C
IK-code *)	IK09

https://www.pcelectric.at/shop/en/?func=detail&artnr=1050-0bsc

*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

Changes and printing errors reserved!