
article#	**75625-6-p**
article description	**CEE-wall mounted plug 32A 5p 6h IP44 with switch**
description long	CEE-wall mounted plug 32A 5p 6h IP44 with switch housing material: PA6 rated current: 32A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz contacts: brass connection technology: screw terminals IP protection class: IP44 load max. 25A
GTIN (EAN)	9003399056536
country of origin	AT
customs number	85366990
net weight	0.550 kg
packaging quantitiy	1
minimum order quantitiy	1



ETIM 10.0	EC001319
IEC-amperage	32 A
Voltage according to EN 60309-2	400 V (50+60 Hz) red
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Construction type	Surface mounted device plug
Phase inverter	False
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Untreated

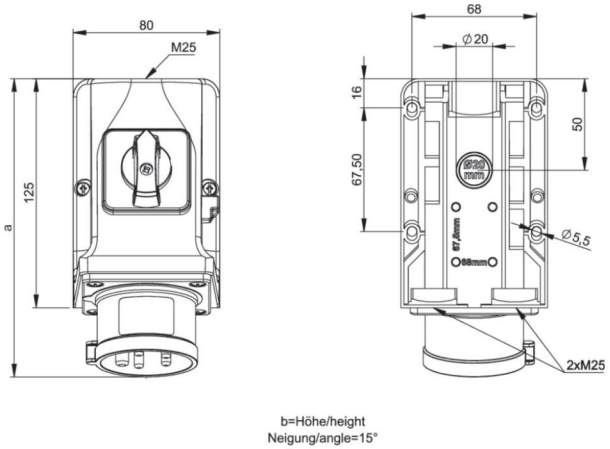

b=Höhe/height
Neigung/angle=15°

a	174 mm
b	128 mm
wire flexible	2,5-6 mm²
wire solid	2,5-6 mm²
housing screws	110 Ncm
connecting screws	110 Ncm
dismantling length	50 mm
stripping length	12-14 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=75625-6-p

Changes and printing errors reserved!

6/2/2026