
| | |
|---|---|
| article# | **4670001** |
| article description | **PRCD-S+ PCE 30mA1.5/1.5m 3G1.5H07 St/Ku** |
| description long | Safety extension cord with PRCD-S+<br>16A 250V~; I∆N = 30mA<br>Housing grey /black /red<br>3m cable H07RN-F 3G1,5mm²<br>Entry: 1,5m cable with TopTaurus2 safety plug (05721-sr)<br>Outlet: 1,5m cable with TopTaurus2 safety connector with hinged lid (25712-sr)<br>Protection degree: IP54<br>PRCD-S+ according DIN VDE 0661<br>DGUV Information 203-006 (former BGI/GUV-I 608)<br>Ready wired, mounted and tested |
| GTIN (EAN) | 9003399321542 |
| country of origin | SI |
| customs number | 85371098 |
| net weight | 0.980 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |






| | |
|---|---|
| ETIM 10.0 | EC000003 |
| Number of poles | 3 |
| Rated voltage | 230 V |
| Rated current | 16 A |
| Rated fault current | 0.03 A |
| Mounting method | Adapter plug |
| Leakage current type | Other |
| Voltage type | AC |
| Frequency | 50 Hz |
| Degree of protection (IP) | IP54 |
| Colour | Grey |
| RAL-number (similar) | 7046 |
| Type of personal protection PRCD | PRCD-S+ |

https://www.pcelectric.at/shop/en/?func=detail&artnr=4670001

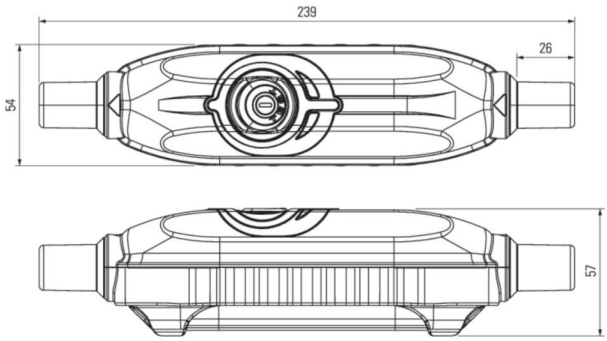

Changes and printing errors reserved!

3/19/2026