
| | |
|---|---|
| article# | **96061441** |
| article description | **CEE-wall mounted socket COMBO-POL 16A 4p 6h IP44** |
| description long | CEE-wall mounted socket COMBO-POL 16A 4p 6h IP44<br>housing material: PA6<br>rated current: 16A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>cable entry: top or rear<br>with ON/OFF (0-I) switch AC22A<br>with safety socket 16A 250V (French/Belgian system)<br>IP protection class: IP44 |
| GTIN (EAN) | 9003399709753 |
| country of origin | PL |
| customs number | 85366990 |
| net weight | 0.700 kg |
| packaging quantitiy | 1 |
| minimum order quantitiy | 1 |



| | |
|---|---|
| ETIM 9.0 | EC001324 |
| IEC-amperage | 16 A |
| Number of poles | 4 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP44 |
| Switch | With on/off switch, without locking |
| Material housing | Plastic |

| | |
|---|---|
| a | 209 mm |
| wire flexible | 1-2,5 mm² |
| wire solid | 1-4 mm² |
| contact screws | 100 Ncm |
| housing screws | 110 Ncm |
| connecting screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 10-12 mm |

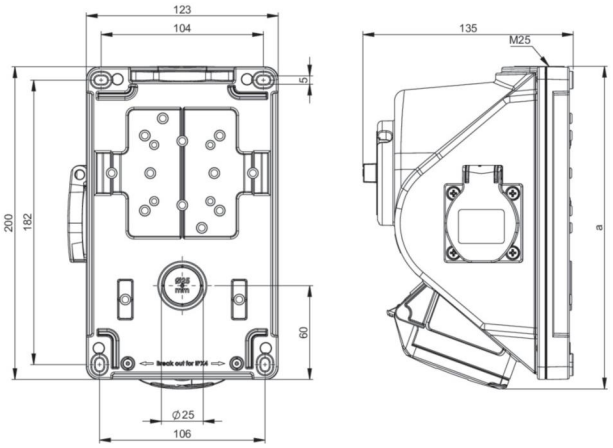


https://www.pcelectric.at/shop/en/?func=detail&artnr=96061441

Changes and printing errors reserved!

5/26/2025