
article#	**2512-asc**
article description	**Taurus2 rubber safety connector lid nat SH IP54 (anthracite/black)**
description long	Safety connector series Taurus2 - rubber with hinged lid color (housing/ring/cover): anthracite/black/black material (housing/contact carrier): TPE/PA6 earthing system: Austrian/German with shutter 16A/ 250V AC / 3p (2P+E), protection rating: IP54
country of origin	AT
customs number	85366990
net weight	0.096 kg
packaging quantitiy	20
minimum order quantitiy	500



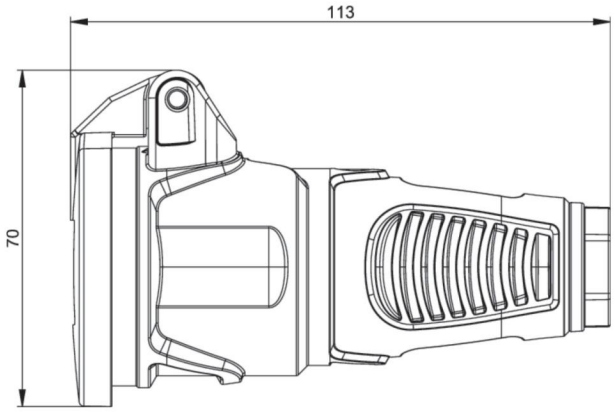

ETIM 10.0	EC001327
Model	Coupler with protective contact CEE 7/3 (type F)
Material	Rubber
Material quality	Thermoplastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Colour	Grey
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

K (cable Ø)	6-13 mm
wire flexible	1-2,5 mm²
contact screws	80 Ncm
housing screws	110 Ncm
strain relief	110 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=2512-asc



Changes and printing errors reserved!

3/19/2026