
article#	**8013-2v**
article description	**CEE angled plug 16A 3p 2h IP44 TWIST**
description long	CEE angled plug 16A 3p 2h IP44 TWIST housing material: PA6 rated current: 16A number of poles: 3 (2P+PE) clock-position: 2h rated voltage/frequency: >50V~ / 300-500Hz contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44
country of origin	AT
customs number	85366990
net weight	0.107 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 10.0	EC000140
IEC-amperage	16 A
Number of poles	3
Voltage according to EN 60309-2	50-500 V (>300-500 Hz) green
Clock hour position	2 h
Identification colour	Green
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Gland nut
Suitable for cable diameter	6 – 15 mm
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

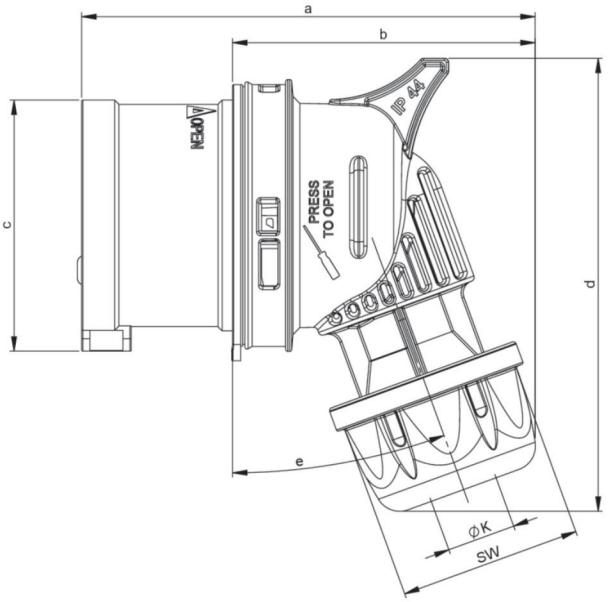

a	96 mm
b	60 mm
c	47 mm
d	88 mm
e	15 °
K (cable Ø)	6-15 mm
SW	38 mm
wire flexible	1-2,5 mm²
contact screws	100 Ncm
strain relief	500 Ncm
dismantling length	50 mm
stripping length	10-12 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=8013-2v

3/18/2026

Changes and printing errors reserved!