
article#	**02592-6vh**
article description	**CEE-plug 30A 4P5W 6h IP67 UL**
description long	CEE Plug 30A 4P5W (5p) 6h UL voltage acc. IEC60309 series II: 200/346 to 240/415VAC with screw terminals contacts: brass nickel-plated housing material: PA6 approvals: UL listed (C/US) & ÖVE protection of degree: IP67 watertight
GTIN (EAN)	9003399693090
country of origin	AT
customs number	85366990
net weight	0.276 kg
packaging quantitiy	10
minimum order quantitiy	10



ETIM 10.0	EC000140
IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	5
Clock hour position	6 h
Identification colour	Red
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Cable entry	Gland nut
Suitable for cable diameter	16.4 – 22.2 mm
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

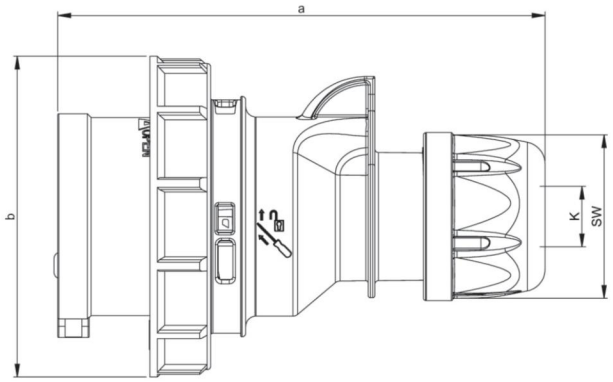

a	155 mm
b	100 mm
K (cable Ø)	16,4-22,2 mm
SW	50 mm
wire flexible	2,5-6 mm²
contact screws	110 Ncm
strain relief	700 Ncm
dismantling length	50 mm
stripping length	12-14 mm
temperature resistance	-25 – 80 °C

https://www.pcelectric.at/shop/en/?func=detail&artnr=02592-6vh

3/18/2026 Changes and printing errors reserved!